

Mode	Status	Low Input LED/ 6 sec LED	Normal LED	High Input LED/ 180 sec LED
Off-Mode	Voltage Protector is OFF, AC power connected	LED is flashing	LED is flashing	LED is flashing
	Voltage Protector is OFF, AC power disconnected	LED is OFF	LED is OFF	LED is OFF

6 RECOMMENDED USES

6 sec Delay		180 sec Delay
TV	SOHO Copier (Under 1.8KVA)	Refrigerator (up to 27 Cu.Ft.)
VHS	Microwave	Water Coolers
DVD Player	Stand Mixer	Domestic Freezer
Satellite Decoder	Juice Extractor	Ice Maker
Cable Decoder	Washing Machine	Executive Refrigerator
Game Consoles	PBX Telephone	Air Conditioner 12000 BTU
Wireless Telephone	Coffee Maker	Portable Air Conditioners
Home Theater	Printers (Under 1.8KVA)	Digital Antenna
Music Equipment	Scanner	Telecommunications Equipment
Fax Machines	Desktop Computers	
Computer	Laptops	
Cable Modem	Multifunction Printers	
Router	Calculators	
Answering Machine	Transceiver	

7 SPECIFICATIONS

Nominal Voltage	110-120Vac	220-240Vac
Max. Current	10 Amp	10 Amp
Frequency	50Hz or 60Hz	50Hz or 60Hz
Input Plug Type	Nema5-15P	Nema5-15P
Output Socket Type	Nema5-15R*4pcs	Universal Nema*4pcs
Spike Protection	900 Joules	900 Joules
Delay Timer	6 sec / 180 sec	6 sec / 180 sec
Input Line Low Loss	90Vac (@110Vac)	180Vac (@220Vac)
Input Line Low Comeback	95Vac (@110Vac)	190Vac (@220Vac)
Input Line High Loss	140Vac (@110Vac)	268Vac (@220Vac)
Input Line High Comeback	135Vac (@110Vac)	260Vac (@220Vac)
Cable Length	1.2M(3.9ft)	1.2M(3.9ft)

1701-0071683 SPV-AplusB-I550-4P-01

A+Plus®

Aplus, Reliable Power Brand Deserve Your Trust

USER'S MANUAL



This manual provides safety, installation and operation instructions which will guide you to the best performance of your equipment. Please read and keep this manual.

APLUS® is a trademark of APLUS POWER CORP. and is manufactured under its authority. All designs and contents are subject to changes without prior notice. © Copyright 2022 APLUS® all rights reserved.

1 INTRODUCTION

► OVERVIEW

The Product is a multi-outlet design Voltage Protector, prevents damages to electrical and electronic equipment from power fluctuation, especially over and under voltage levels of long duration. The 6-180 sec delay reconnection provides protection against power-back surge commonly experienced after resumption of power in a power cut situation. Build-in MOV excess electricity for additional protection. The Product will automatically guard your equipment against brownouts or transient spikes induced by lighting or power line failure.

► FEATURES

- Microprocessor Controlled Design
- Grounded Multi-outlet Design
- Surge Suppression 900 Joules
- Delay Reconnection Selector 6 - 180 sec
- Provide Overload Protection
- Wall Mountable


2 CAUTION

- Be sure to operate within the power rating of the Voltage Protector.
- **DO NOT** install the Voltage Protector near dust, corrosive fumes and conductive contaminants.
- **DO NOT** install the Voltage Protector near excessive humidity, under sunshine or near heating appliances such as a radiator or heater.
- **DO NOT** attempt to disassemble the Voltage Protector. The Voltage Protector contains no user-serviceable parts inside.

3 OPERATION

1. Make sure that your load does not exceed the rating of Voltage Protector, the rating capacity is shown on product unit.
2. The limits of the Voltage Protector are specified on product unit. Power output will be cut off when input voltage falls below or rises above the specified input limits.

3. Set up the delay timer:

 a) 6 seconds is suggested to protect general electronic load.


 b) 180 seconds is suggested to protect the refrigeration load.

See Table of Recommended Uses for more suitable applications.

4. Before power in, please turn off the load that you want to protect.

5. Connect the output socket of Voltage Protector to the input plug of load, and then plug the Voltage Protector into wall socket.
6. Once AC power is supplied to Voltage Protector, the LED indicator lights up initially in the stand-by mode. Once the delay timer has elapsed, the Normal LED will remain ON and the load will be energized and protected.
7. Turn off the Voltage Protector unit by pressing the power switch for 1 second. Turn on the Voltage Protector unit by pressing the power switch for 1 second.
8. If Voltage Protector is overload, circuit breaker will be tripped, and output will be cut off. Please remove some load first, and make sure the equipment plugged into the Voltage Protector is not overloading the capacity of Voltage Protector.

4 OVERVIEW

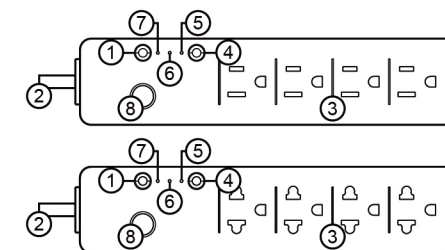

1. Power On/Off switch
2. AC input line cord
3. Output sockets
4. Delay timer setting 6 sec / 180 sec
5. LED for Low Input voltage / 6 sec start up delay
6. LED for Normal Input voltage
7. LED for High Input voltage / 180 sec start up delay
8. AC circuit breaker

5 INDICATION TABLE

Mode	Status	Low Input LED/ 6 sec LED	Normal LED	High Input LED/ 180 sec LED
AC mode	AC input voltage is low voltage	LED is ON	LED is OFF	LED is OFF
	AC input voltage is normal	LED is OFF	LED is ON	LED is OFF
	AC input voltage is high voltage	LED is OFF	LED is OFF	LED is ON
Stand-by Mode	6 sec start up delay	LED is flashing	LED is OFF	LED is OFF
	180 sec start up delay	LED is OFF	LED is OFF	LED is flashing