



APB-1240



- > GEL Battery
- > High Rate Battery
- > Deep-Cycle Battery
- > Value Regulated Lead-Acid Battery
- > Maintenance Free Lead-Acid Battery
- > No Electrolyte Leakage
- > Ensure Safe and Efficient Operation

Dimension

Unit: inch(mm)

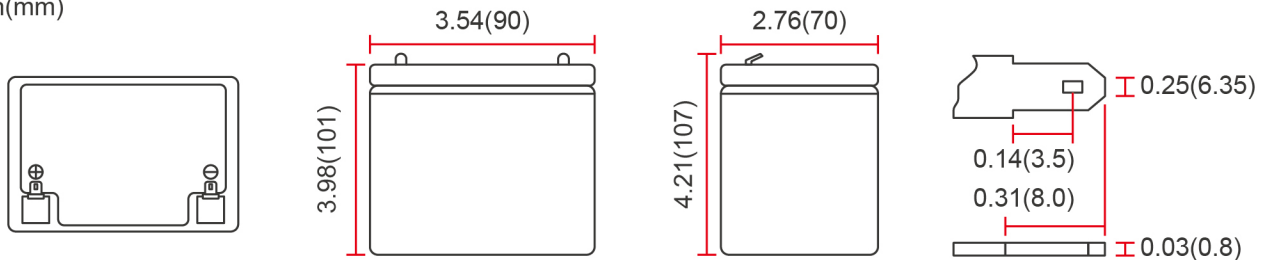

Specifications

Nominal Voltage	12V	
Rated Capacity (20hr Rate)	4.0Ah	
Dimensions	Length	3.54inches (90mm)
	Width	2.76inches (70mm)
	Height	3.98inches (101mm)
	Total Height	4.21inches (107mm)
Weight	Approx. 2.86lbs (1.30Kg)	

Characteristics

Capacity 77°F(25°C)	20hour rate (0.20A)	4.00Ah
	10hour rate (0.37A)	3.70Ah
	5hour rate (0.68A)	3.40Ah
	1hour rate (2.60A)	2.60Ah
Internal Resistance	Full Charged, 77°F(25°C)	35mΩ
Capacity Affected By Temperature(10hr Rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
	5°F(-15°C)	65%
Self-Discharge 77°F(25°C)	Capacity after 3 month storage	90%
	Capacity after 6 month storage	80%
	Capacity after 9 month storage	60%
Charge(Constant Voltage)	Initial Charge Current "LESS" than 1.20A	
	Cycle	14.4-15.0V/77°F(25°C)
	Stand By	13.5-13.8V/77°F(25°C)

Applications



Uninterruptible Power Supply



Telecom



Emergency Lighting



Security System




Instrumentation




Solar Powered System

Discharge Current and Discharge Duration Time

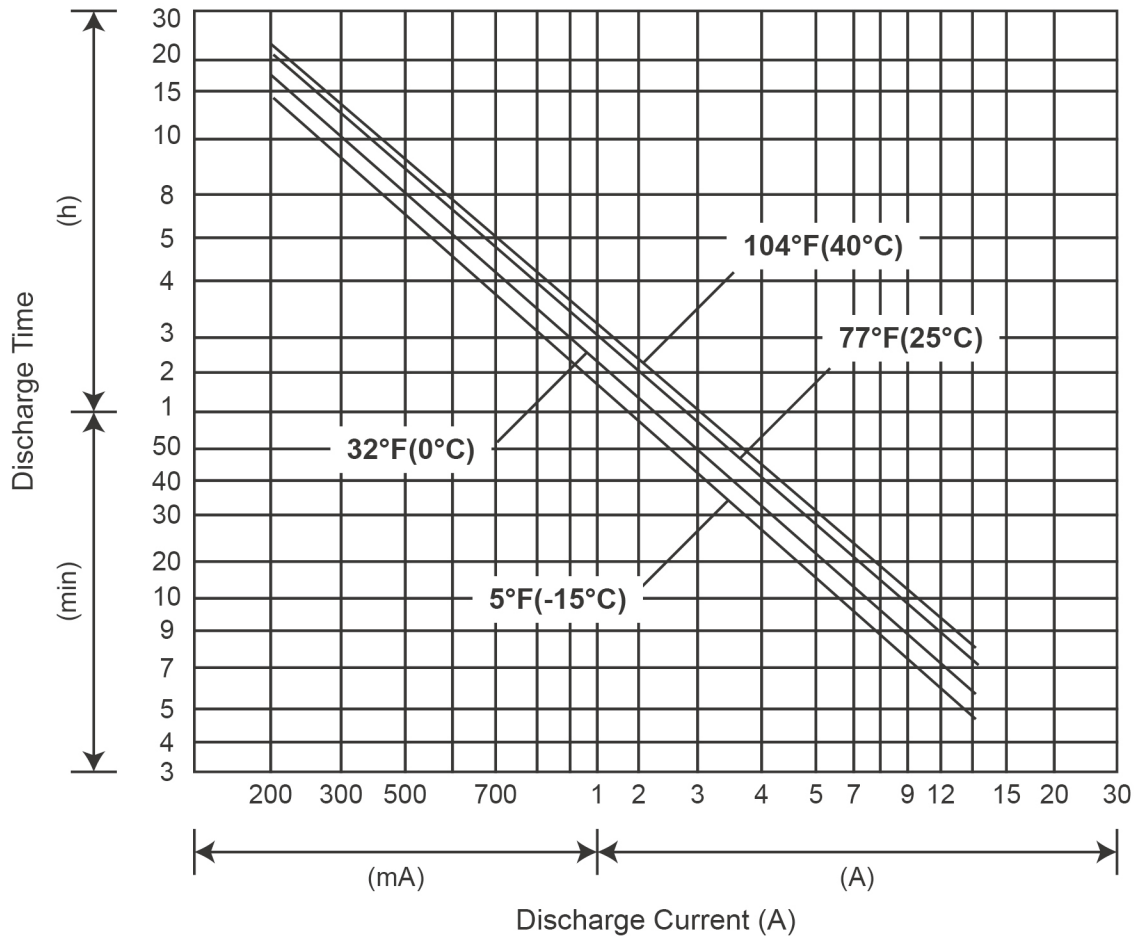

Discharge Curves 77°F(25°C)

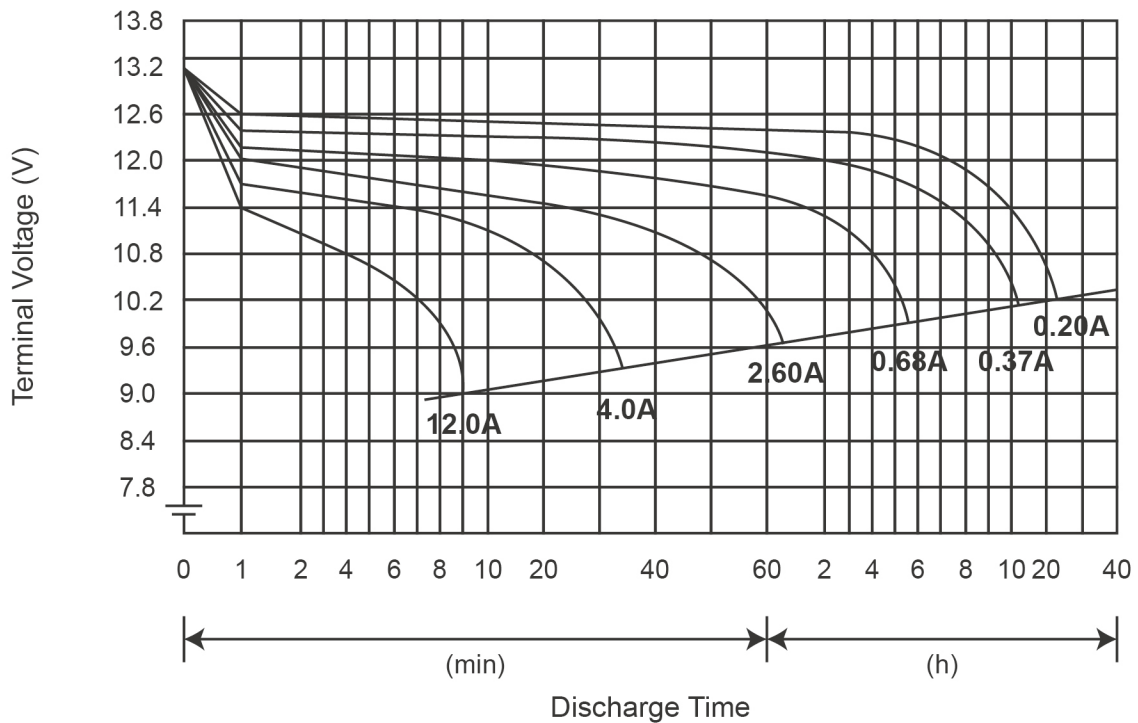


Constant Current Discharge Characteristics Unit:A(25°C,77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	5HR	8HR	10HR	20HR
9.6V	14.4	9.93	7.45	4.54	2.68	1.53	1.12	0.71	0.46	0.39	0.21
10.0V	13.3	9.35	7.1	4.38	2.64	1.50	1.1	0.70	0.46	0.38	0.21
10.2V	12.8	9.08	6.91	4.31	2.61	1.48	1.09	0.70	0.45	0.37	0.20
10.5V	11.8	8.54	6.6	4.15	2.56	1.46	1.07	0.69	0.44	0.36	0.20
10.8V	10.6	7.92	6.21	4.06	2.51	1.42	1.05	0.67	0.43	0.36	0.19
11.1V	9.32	7.16	5.73	3.84	2.46	1.40	1.01	0.66	0.43	0.35	0.18

Constant Power Discharge Characteristics Unit:W(25°C,77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	5HR	8HR	10HR	20HR
9.6V	155	110	86	52.7	30.7	17.4	12.7	8.3	5.4	4.3	2.3
10.0V	143	103	81.2	51.1	30.2	17.1	12.4	8.1	5.2	4.3	2.3
10.2V	136	100	78.6	50.3	29.8	16.9	12.3	8.0	5.2	4.2	2.3
10.5V	125	93	74.4	48.8	29.2	16.6	12.1	7.9	5.1	4.1	2.2
10.8V	113	86	69	46.7	28.5	16.3	11.7	7.6	4.9	4.0	2.2
11.1V	100	78	65.4	44.7	27.6	15.8	11.4	7.4	4.8	3.9	2.1

Cycle Service Life (@25°C/77°F)

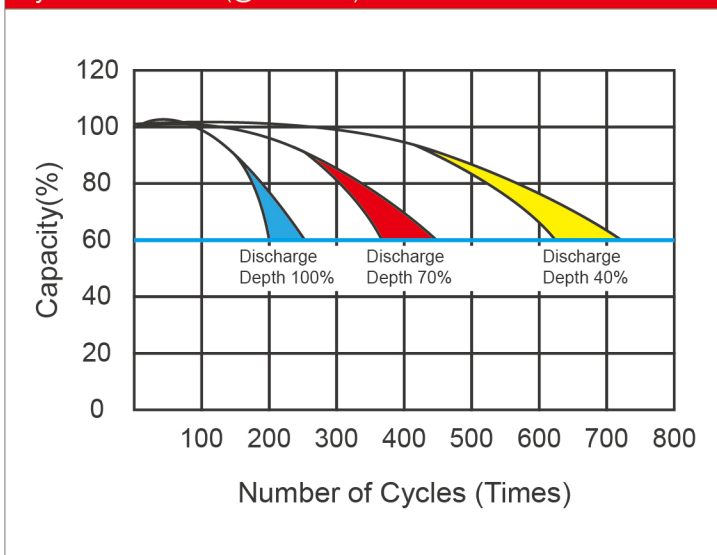

Capacity Retention Characteristic

