


APB-1270



- > GEL Battery
- > High Rate Battery
- > Deep-Cycle Battery
- > Value Regulated Lead-Acid Battery
- > Maintenance Free Lead-Acid Battery
- > No Electrolyte Leakage
- > Ensure Safe and Efficient Operation

Dimension

Unit: inch(mm)

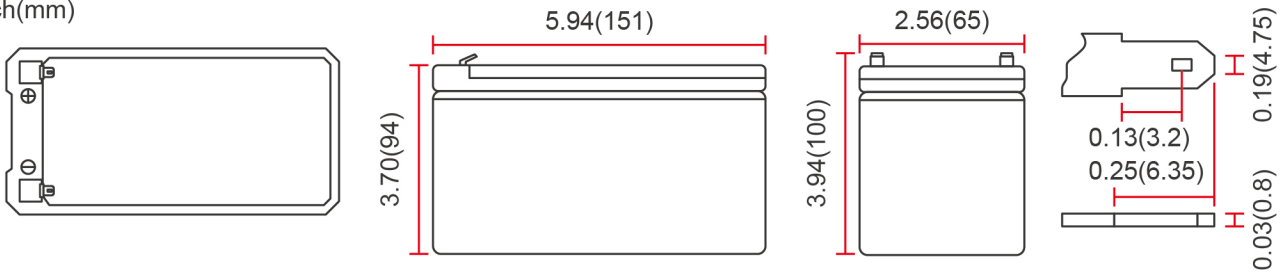

Specifications

Nominal Voltage	12V	
Rated Capacity (20hr Rate)	7Ah	
Dimensions	Length	5.94inches (151mm)
	Width	2.56inches (65mm)
	Height	3.70inches (94mm)
	Total Height	3.94inches (100mm)
Weight	Approx. 4.41lbs (2.0kgs)	

Characteristics

Capacity 77°F(25°C)	20hour rate (0.33A)	6.60Ah
	10hour rate (0.59A)	5.90Ah
	5hour rate (1.11A)	5.55Ah
	1hour rate (4.23A)	4.23Ah
Internal Resistance	Full Charged, 77°F(25°C)	35mΩ
Capacity Affected By Temperature(10hr Rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
	5°F(-15°C)	65%
Self-Discharge 77°F(25°C)	Capacity after 3 month storage	90%
	Capacity after 6 month storage	80%
	Capacity after 9 month storage	60%
Charge(Constant Voltage)	Initial Charge Current "LESS" than 2.1A	
	Cycle	14.6-15.0V/77°F(25°C)
	Stand By	13.6-13.9V/77°F(25°C)

Applications



Uninterruptible Power Supply



Telecom



Emergency Lighting



Security System





Instrumentation



Solar Powered System

Discharge Current and Discharge Duration Time

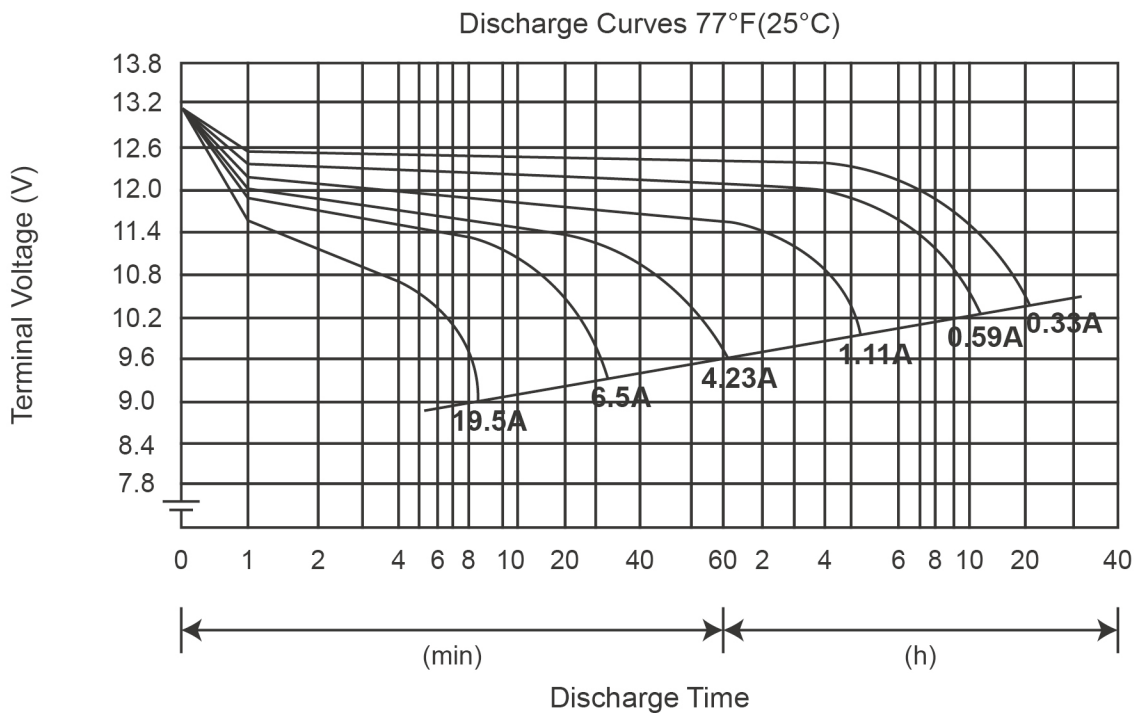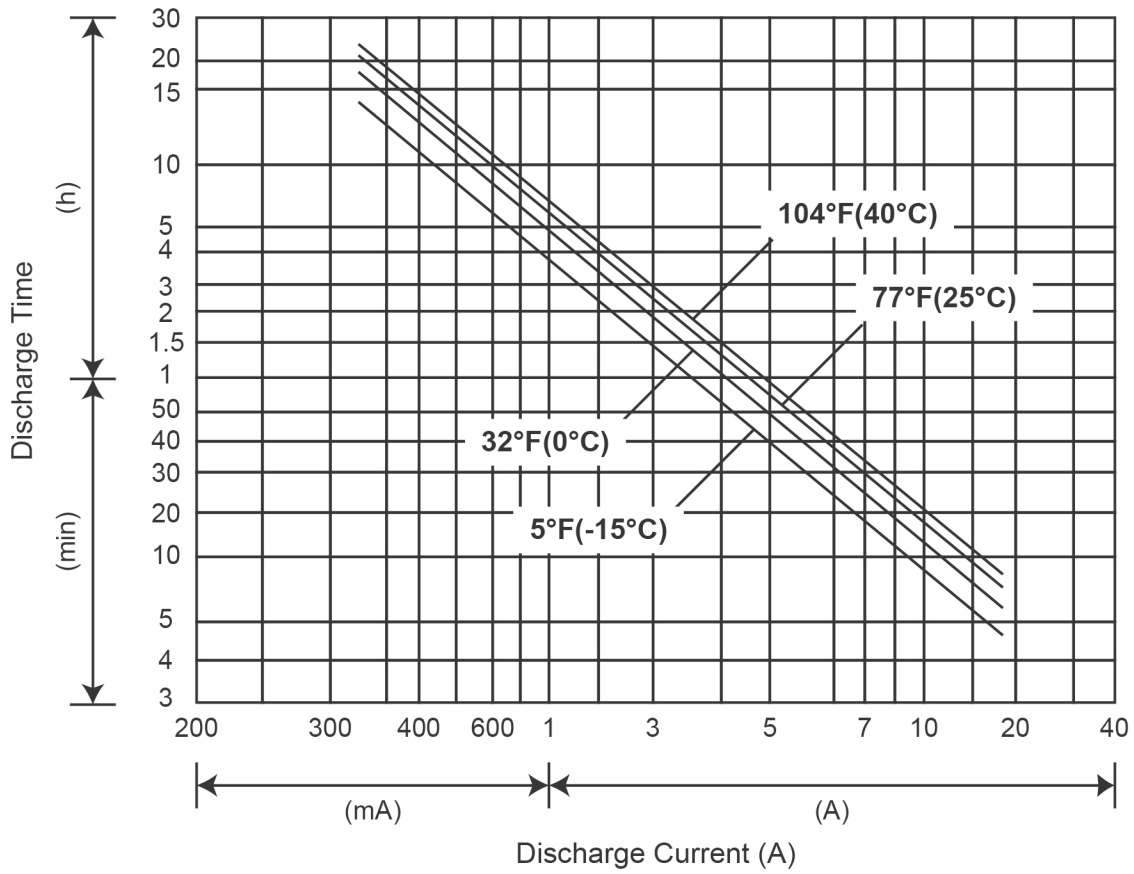


Constant Current Discharge Characteristics Unit:A(25°C,77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	5HR	8HR	10HR	20HR
9.6V	26.0	17.9	13.4	8.19	4.84	2.74	2.0	1.28	0.85	0.68	0.36
10.0V	24.1	16.9	12.8	7.91	4.76	2.68	1.97	1.25	0.83	0.67	0.36
10.2V	23.1	16.4	12.5	7.77	4.71	2.65	1.95	1.24	0.82	0.66	0.35
10.5V	21.2	15.4	11.9	7.49	4.61	2.61	1.91	1.23	0.81	0.65	0.35
10.8V	19.2	14.3	11.2	7.21	4.52	2.62	1.87	1.20	0.79	0.64	0.34
11.1V	16.8	12.8	10.3	6.93	4.44	2.49	1.81	1.18	0.78	0.64	0.33

Constant Power Discharge Characteristics Unit:W(25°C,77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	5HR	8HR	10HR	20HR
9.6V	279	197	153	94.2	54.3	31.5	22.6	14.6	9.7	7.8	4.1
10.0V	256	184	144	91.7	53.7	30.3	22.1	14.4	9.5	7.7	4.1
10.2V	244	178	141	90.2	52.6	29.7	21.8	14.2	9.4	7.6	4.0
10.5V	223	167	136	87.6	51.4	29	21.4	14.0	9.2	7.5	4.0
10.8V	201	153	125	83.9	49.8	28.3	20.8	13.6	8.9	7.3	3.9
11.1V	179	139	117	79.8	48.1	27.4	20.2	13.1	8.7	7.0	3.7

Cycle Service Life (@25°C/77°F)

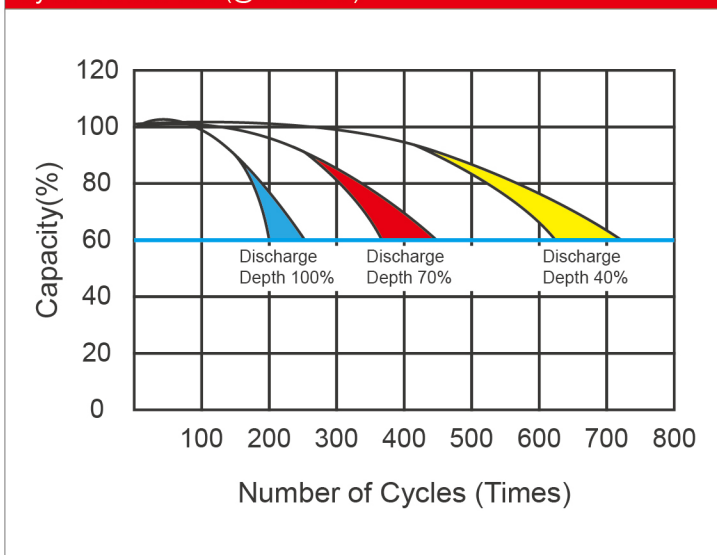

Capacity Retention Characteristic

