


PlusCharger 2 Series

The PlusCharger 2-15A-18M is a Smart Charger Station rated at 15 Amps, it provides overload protection through power switch with built-in resettable circuit breaker. Built in MOV excess electricity for additional protection. It also equipped with smart charging station, SC-5VDC, USB charging port for smart devices power charging. The PlusCharger 2-15A-18M can ensure electrical safety and also provide power for devices with cables that can't reach any nearby electrical outlets.

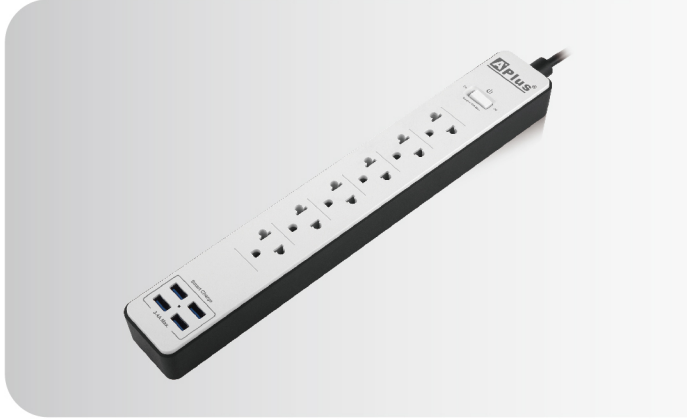

- > Absorbs Excess Electricity through MOVs
- > Power Switch with Resettable Circuit Breaker
- > Fire Retardant Plastic Material
- > Provide Lightning, Surge, Overload Protection
- > Surge Suppression 900 Joules
- > Smart Charging Station 5VDC USB Charging Port
- > Grounded Multi-outlet Design
- > Wall Mountable

Specifications:

MODEL	PlusCharger 2-15A-18M
INPUT	
Voltage Range	110 - 240Vac
Frequency	50Hz or 60Hz
Type of Input	NEMA 5-15P plug
Cable Length	1.8M (5.9ft)
OUTPUT	
Power Rating	15A
Type of Output: Universal Nema	6 receptacles
USB Charging Port	5VDC, 4 ports, 3.4A Max.
PROTECTION	
Surge Rating	900 Joules
Overload Protection	Yes
Power Safety Shutdown	Yes
PHYSICAL	
Dimensions	320*50*32mm

*Product specifications are subject to change without further notice.