


## PlusCharger 5 Series

The PlusCharger 5-10A-12M is a Surge Protector rated at 10 Amps, it provides overload protection through power switch with built-in resettable circuit breaker. Built in MOV excess electricity for additional protection. It also equipped with smart charging station, SC-5VDC, USB charging port for smart devices power charging. The PlusCharger 5-10A-12M can provide reliable protection from power surges and damaging spikes to guard your small appliances and sensitive electronics.

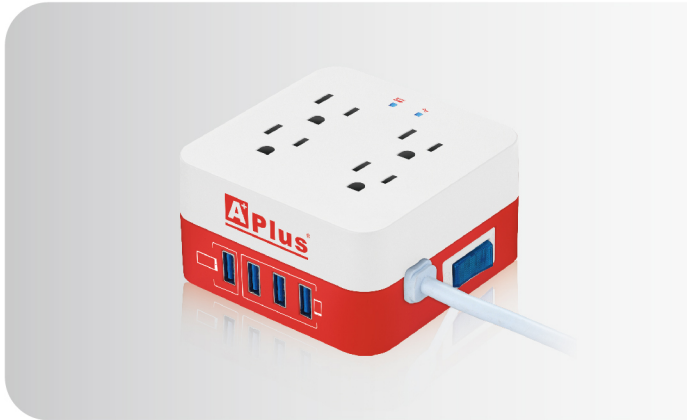

- > Absorbs Excess Electricity through MOVs
- > Power Switch with Resettable Circuit Breaker
- > Fire Retardant Plastic Material
- > Provide Lightning, Surge, Overload Protection
- > Surge Suppression 900 Joules
- > Smart Charging Station 5VDC USB Charging Port

### Specifications:

MODEL	PlusCharger 5-10A-12M
<b>INPUT</b>	
AC Rating	110 - 240Vac
Frequency	50/60Hz (Auto-sensing)
Type of Input	Nema5-15P plug
Cable Length	1.2M (3.9ft)
<b>OUTPUT</b>	
Type of Output: Nema5-15R	4 receptacles
USB Charging Port	5VDC, 4 ports, 2.4A Max.
<b>INDICATOR</b>	
POWER ON	Blue LED is ON
5VDC USB Charging	Blue LED is ON
<b>PROTECTION</b>	
Surge Rating	900 Joules
Overload Protection	Yes
Power Safety Shutdown	Yes

\*Product specifications are subject to change without further notice.