


## PlusCharger 3 Series

The PlusCharger 3 Series is a Smart Charger Station rated at 10 Amps, it provides overload protection through power switch with built-in resettable circuit breaker. Built in MOV excess electricity for additional protection. It also equipped with smart charging station, SC-5VDC, USB charging port for smart devices power charging. The PlusCharger 3 Series can ensure electrical safety and also provide power for devices with cables that can't reach any nearby electrical outlets.

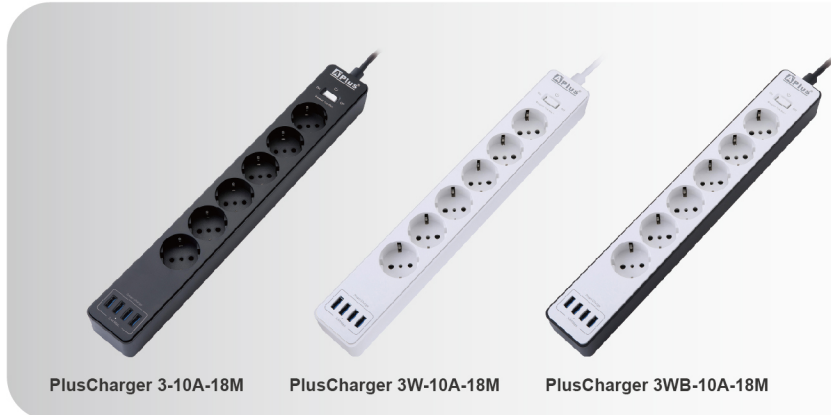

- > Absorbs Excess Electricity through MOVs
- > Power Switch with Resettable Circuit Breaker
- > Fire Retardant Plastic Material
- > Provide Lightning, Surge, Overload Protection
- > Surge Suppression 900 Joules
- > Smart Charging Station 5VDC USB Charging Port
- > Grounded Multi-outlet Design
- > Wall Mountable

### Specifications:

MODEL	PlusCharger 3-10A-18M	PlusCharger 3W-10A-18M	PlusCharger 3WB-10A-18M
<b>INPUT</b>			
Voltage Range	220 - 240Vac		
Frequency	50Hz or 60Hz		
Type of Input	German plug		
Cable Length	1.8M (5.9ft), 1 mm <sup>2</sup>		
<b>OUTPUT</b>			
Power Rating	10A		
Type of Output: Schuko	6 receptacles		
USB Charging Port	5VDC, 4 ports, 3.4A Max.		
<b>PROTECTION</b>			
Surge Rating	900 Joules		
Overload Protection	Yes		
Power Safety Shutdown	Yes		
<b>PHYSICAL</b>			
Dimensions	375*55*43mm		

\*Product specifications are subject to change without further notice.