


PlusCharger 3 Series

The PlusCharger 3 Series is a Smart Charger Station rated at 10 Amps, it provides overload protection through power switch with built-in resettable circuit breaker. Built in MOV excess electricity for additional protection. It also equipped with smart charging station, SC-5VDC, USB charging port for smart devices power charging. The PlusCharger 3 Series can ensure electrical safety and also provide power for devices with cables that can't reach any nearby electrical outlets.

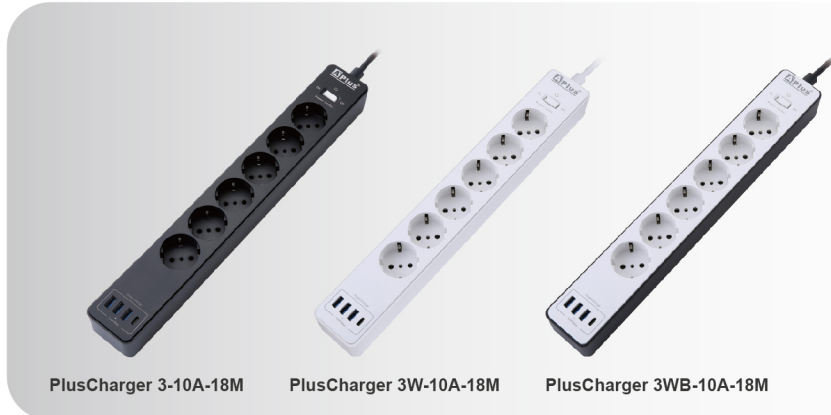

- > Absorbs Excess Electricity through MOVs
- > Power Switch with Resettable Circuit Breaker
- > Fire Retardant Plastic Material
- > Provide Lightning, Surge, Overload Protection
- > Surge Suppression 900 Joules
- > Smart Charging Station 5VDC USB Charging Port
- > Grounded Multi-outlet Design
- > Wall Mountable

Specifications:

| MODEL | PlusCharger 3-10A-18M | PlusCharger 3W-10A-18M | PlusCharger 3WB-10A-18M |
|------------------------|---------------------------------|------------------------|-------------------------|
| INPUT | | | |
| Voltage Range | 220 - 240Vac | | |
| Frequency | 50Hz or 60Hz | | |
| Type of Input | German plug | | |
| Cable Length | 1.8M (5.9ft), 1 mm ² | | |
| OUTPUT | | | |
| Power Rating | 10A | | |
| Type of Output: Schuko | 6 receptacles | | |
| USB Charging Port | 5VDC, 4 ports, 3.4A Max. | | |
| PROTECTION | | | |
| Surge Rating | 900 Joules | | |
| Overload Protection | Yes | | |
| Power Safety Shutdown | Yes | | |
| PHYSICAL | | | |
| Dimensions | 375*55*43mm | | |

*Product specifications are subject to change without further notice.