

# PlusPRO 5 Series Rack/Tower

**ON-LINE UPS** 

6000VA & 10000VA

#### **PlusPRO 5 Series**

## **6KVA/5.4KW** & **10KVA/9KW**





Tower Type

Rack Type

#### **Product Introduction**

**PlusPRO 5** series 6KVA to 10KVA is a true double conversion online UPS with **pure** sinewave output, zero transfer time and enhanced capacity. With split-type design, it flexibly complies with users' demand no matter for standard or long time operation.

Featuring 6KVA, 10KVA integrated with **LCD display**, **Power Distribution Unit(PDU)**, **high output power factor 0.9**, outstanding performance, optional external battery bank.























# **Basic Functional Module and Power Topology**

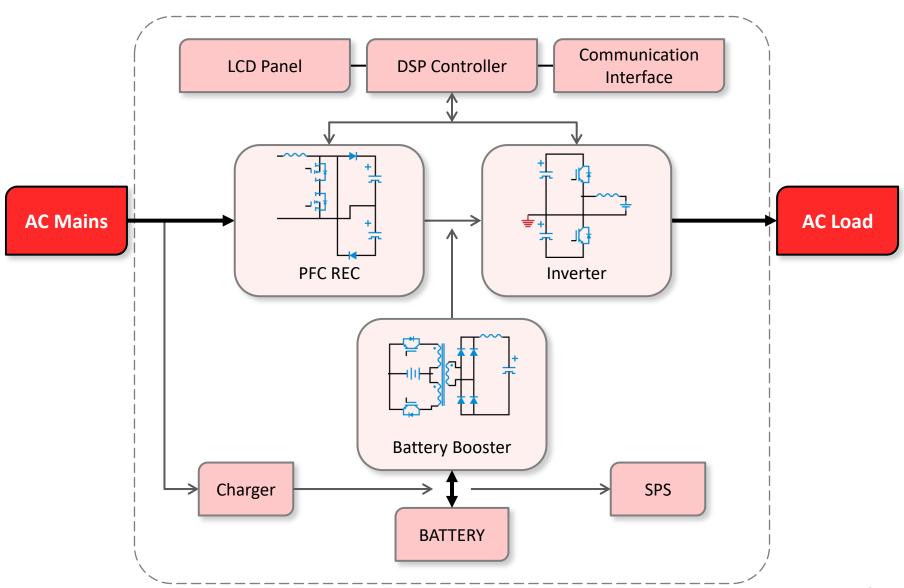


#### **Structural Diagram** – PlusPRO 5-6K

#### **Standard Model with PDU Module**

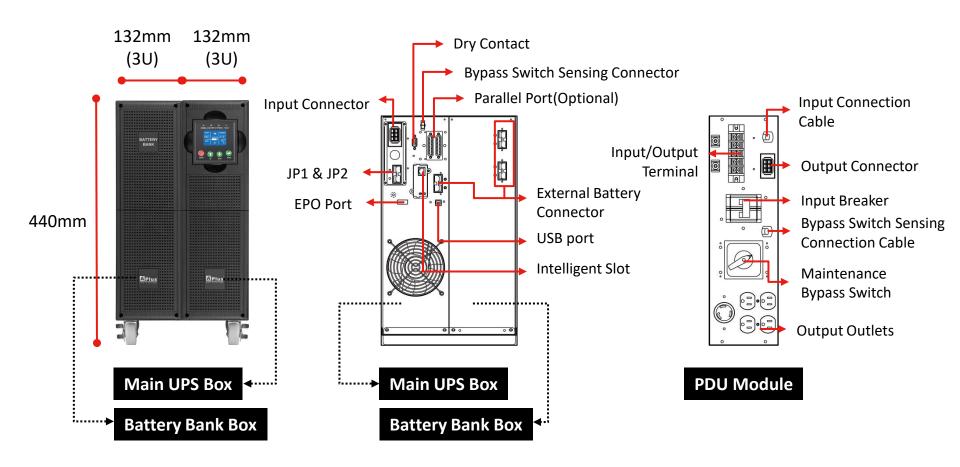


#### **Structural Diagram** – PlusPRO 5-10K

#### **Standard Model with PDU Module**

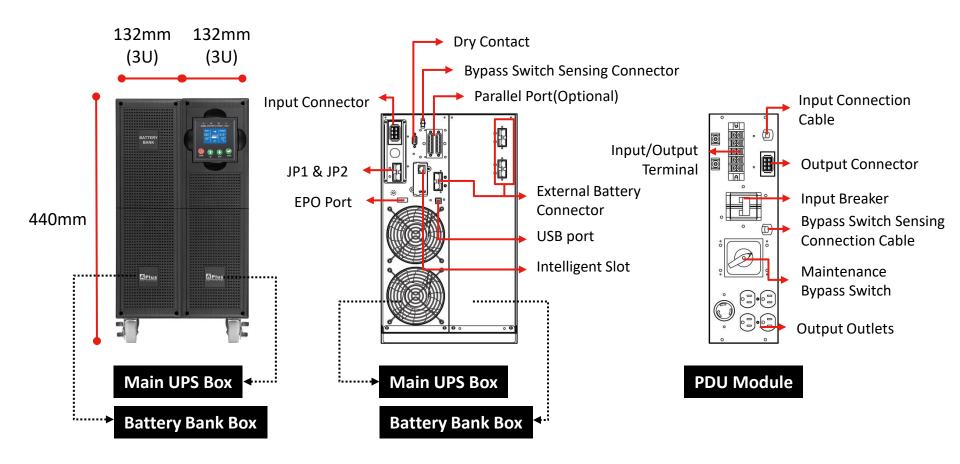


#### **Structural Diagram** – PlusPRO 5-6K

#### **Optional Model without PDU Module**

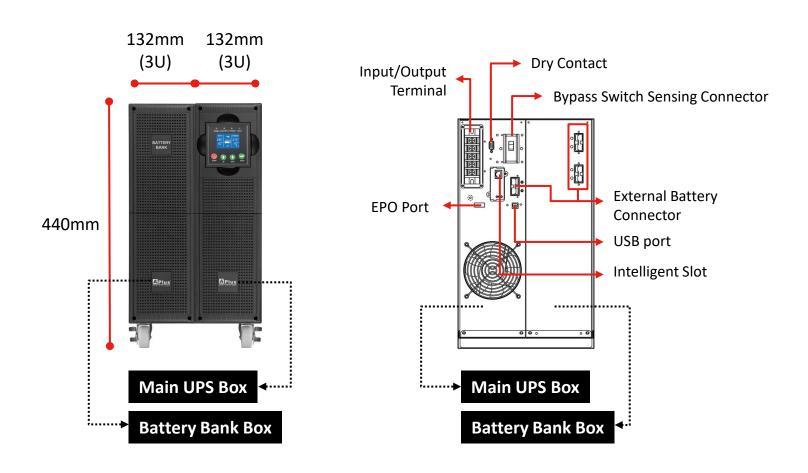


#### **Structural Diagram** – PlusPRO 5-10K

#### **Optional Model without PDU Module**

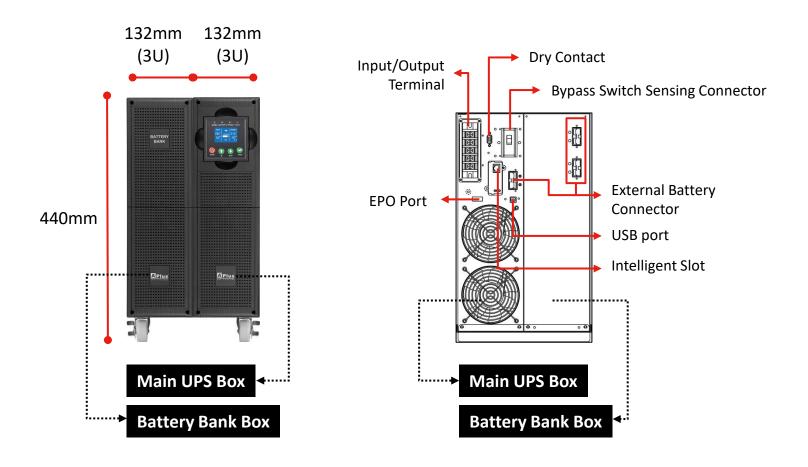

## **Accessories**

## **Tray Wheels**

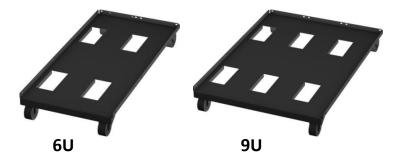

## **Mounting Bracket**





## **Stabilizing Feet**





## PDU








## **Tower/Rack Convertible**

#### Rotate the screen 90 degrees

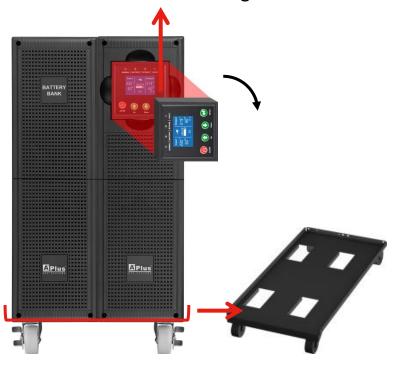




Remove the Tray Wheels

**Tower Type** 


Rack Type

## **External Battery Bank**

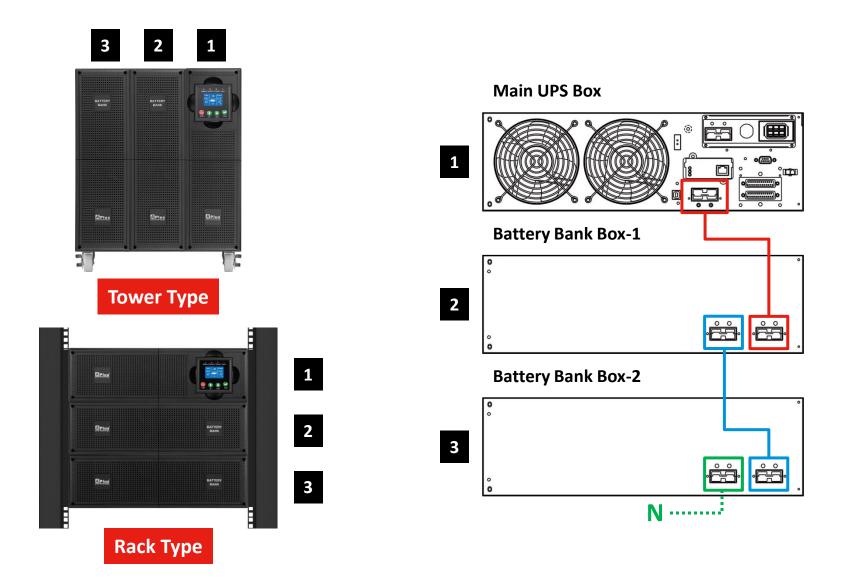


## **Control Panel Information**


# **LED Definition**: Normal LED / Battery LED / Bypass LED / Fault LED

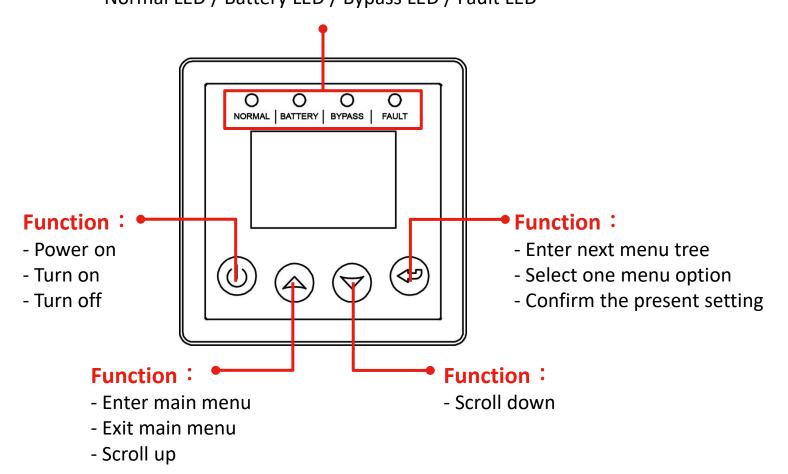


# **LCD Display**

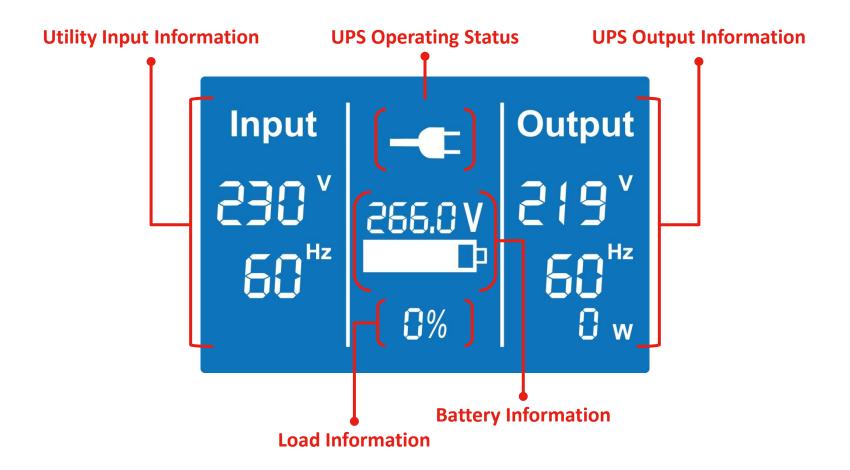


#### **Features**









- 92% High efficiency mode (Line mode)
- Rack/tower convertible design
- Emergency Battery Back-up
- 0.9 Output power factor 0.9
- Pure Sine wave Output
- Modular design

# **Specifications -1**

| MODEL                    | PlusPRO 5-6K                                | PlusPRO 5-10K |  |  |
|--------------------------|---------------------------------------------|---------------|--|--|
| CAPACITY                 | 6KVA/5.4KW                                  | 10KVA/9KW     |  |  |
| INPUT                    |                                             |               |  |  |
| Phase                    | 1 Phase 2 Wires with Ground                 |               |  |  |
| Voltage                  | 220/230/240Vac                              |               |  |  |
| Frequency                | 50Hz or 60Hz (Auto-sensing)                 |               |  |  |
| THDi                     | <5% with R full load                        |               |  |  |
| ОИТРИТ                   |                                             |               |  |  |
| Phase                    | 1 Phase 2 Wires with Ground                 |               |  |  |
| Voltage                  | 220/230/240Vac                              |               |  |  |
| Voltage Regulation       | +/-1%                                       |               |  |  |
| Frequency (Battery Mode) | 50Hz or 60Hz +/-0.05Hz                      |               |  |  |
| Waveform                 | Pure Sinewave                               |               |  |  |
| THD                      | <2% (linear load), <5% (non-linear load)    |               |  |  |
| Crest Ratio              | 3:1                                         |               |  |  |
| EFFICIENCY               |                                             |               |  |  |
| To AC Mode               | >92% at full load and battery fully charged |               |  |  |
| To Battery Mode          | >92% at full load and 12VDC/battery         |               |  |  |
| To ECO Mode              | >96% at full load and battery fully charged |               |  |  |

<sup>\*</sup>Product specifications are subject to change without further notice.

# **Specifications -2**

| MODEL                     | PlusPRO 5-6K                                                                | PlusPRO 5-10K  |  |  |
|---------------------------|-----------------------------------------------------------------------------|----------------|--|--|
| BATTERY                   |                                                                             |                |  |  |
| Туре                      | Maintenance free sealed lead-acid battery                                   |                |  |  |
| Voltage                   | 240VDC                                                                      |                |  |  |
| Capacity & Number         | 12V/7AH*20pcs                                                               | 12V/9AH*20pcs  |  |  |
| Recharge Time             | 7 hours to 90%                                                              | 8 hours to 90% |  |  |
| TRANSFER TIME             |                                                                             |                |  |  |
| Line Mode to Battery Mode | 0ms                                                                         |                |  |  |
| Inverter to Bypass        | Oms                                                                         |                |  |  |
| ECO Mode to Inverter      | <10ms                                                                       |                |  |  |
| DISPLAY                   |                                                                             |                |  |  |
| LED Indicator             | Normal (Green), Bypass (Yellow), Fault (Red), Battery (Yellow)              |                |  |  |
| LCD Display               | Load level, Battery voltage, Battery mode, AC mode, Bypass mode information |                |  |  |
| AUDIBLE ALARM             |                                                                             |                |  |  |
| Battery Mode              | Beeps Every 4 Seconds                                                       |                |  |  |
| Low Battery               | Sounding Every Second                                                       |                |  |  |
| Overload                  | Sounding Twice Every Second                                                 |                |  |  |
| Fault                     | Beeping Continuously                                                        |                |  |  |

# **Specifications -3**

| MODEL                 | PlusPRO 5-6K                       | PlusPRO 5-10K |  |  |
|-----------------------|------------------------------------|---------------|--|--|
| COMMUNICATIONS        |                                    |               |  |  |
| Interface (Port)      | USB Port (Dry Contact is optional) |               |  |  |
| Intelligent Slot      | Yes, but SNMP card is optional     |               |  |  |
| EPO                   | Emergency Power Off                |               |  |  |
| ENVIRONMENT           |                                    |               |  |  |
| Operating Temperature | 0°C-40°C (32°F-104°F)              |               |  |  |
| Humidity              | 0-95% (Non-condensing)             |               |  |  |
| Acoustic Noise        | <50dB at 1M                        |               |  |  |
| PHYSICAL              |                                    |               |  |  |
| Format of Main UPS    | Tower/Rack: 3U                     |               |  |  |
| Main UPS (D*W*H)      | 610*440*135mm                      |               |  |  |
| Format of Battery Box | Tower/Rack: 3U                     |               |  |  |
| Battery Box (D*W*H)   | 610*440*135mm                      |               |  |  |



#### **APLUS POWER CORP.**

Aplus, Reliable Power Brand Deserve Your Trust